

FHWA REG. NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
4	AL	APD-471(39)	1999	2	300






TYPICAL SECTION

PROJECT NO. APD-471(39)

WALKER COUNTY




PROJECT NOTES **GN-2 NOTES**

201	103
204	104
301	105
302	108
303	110
	112

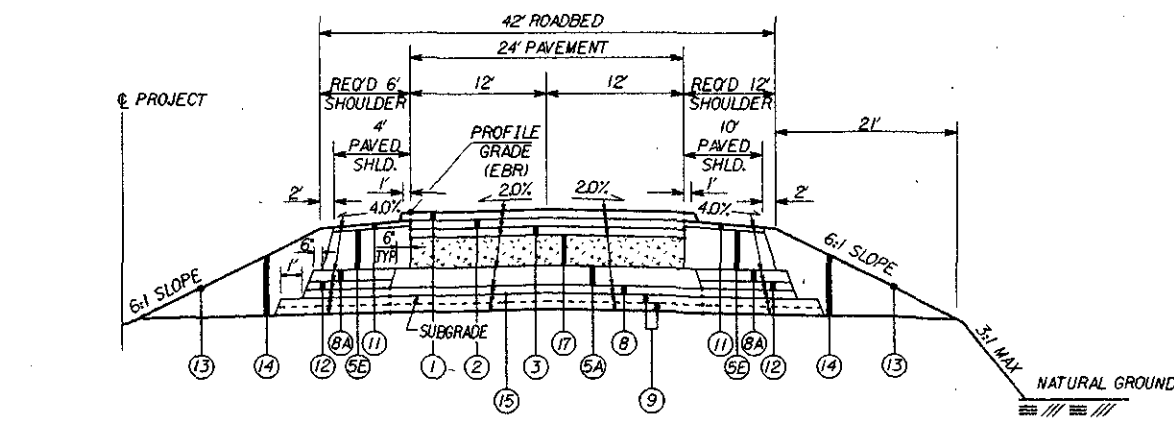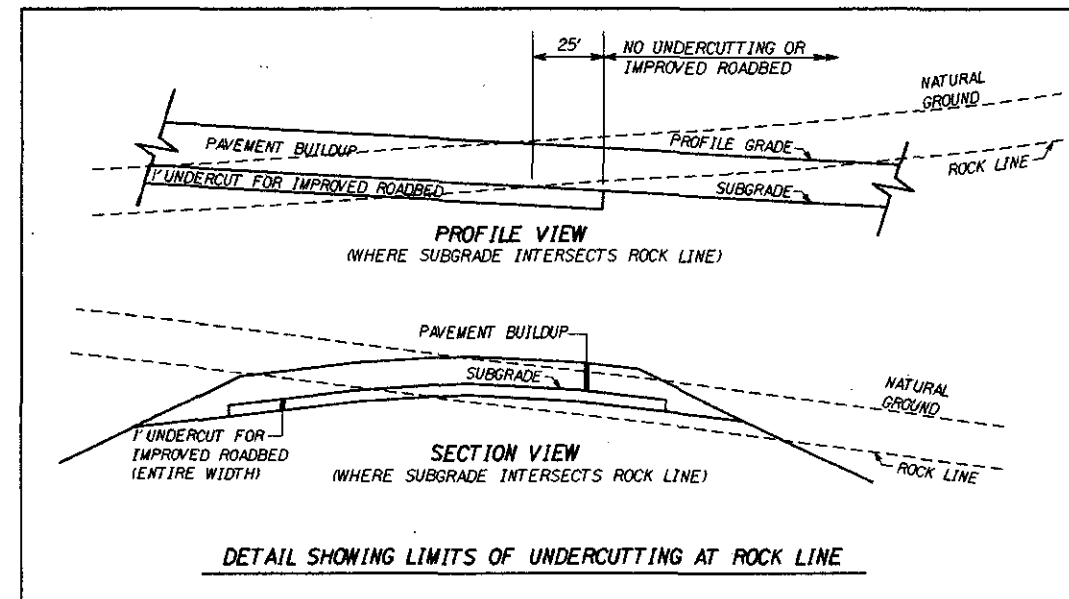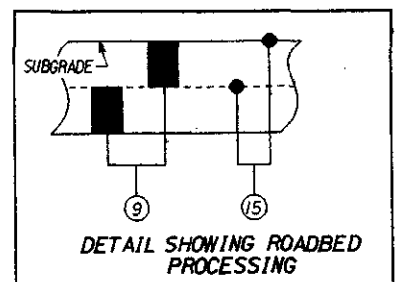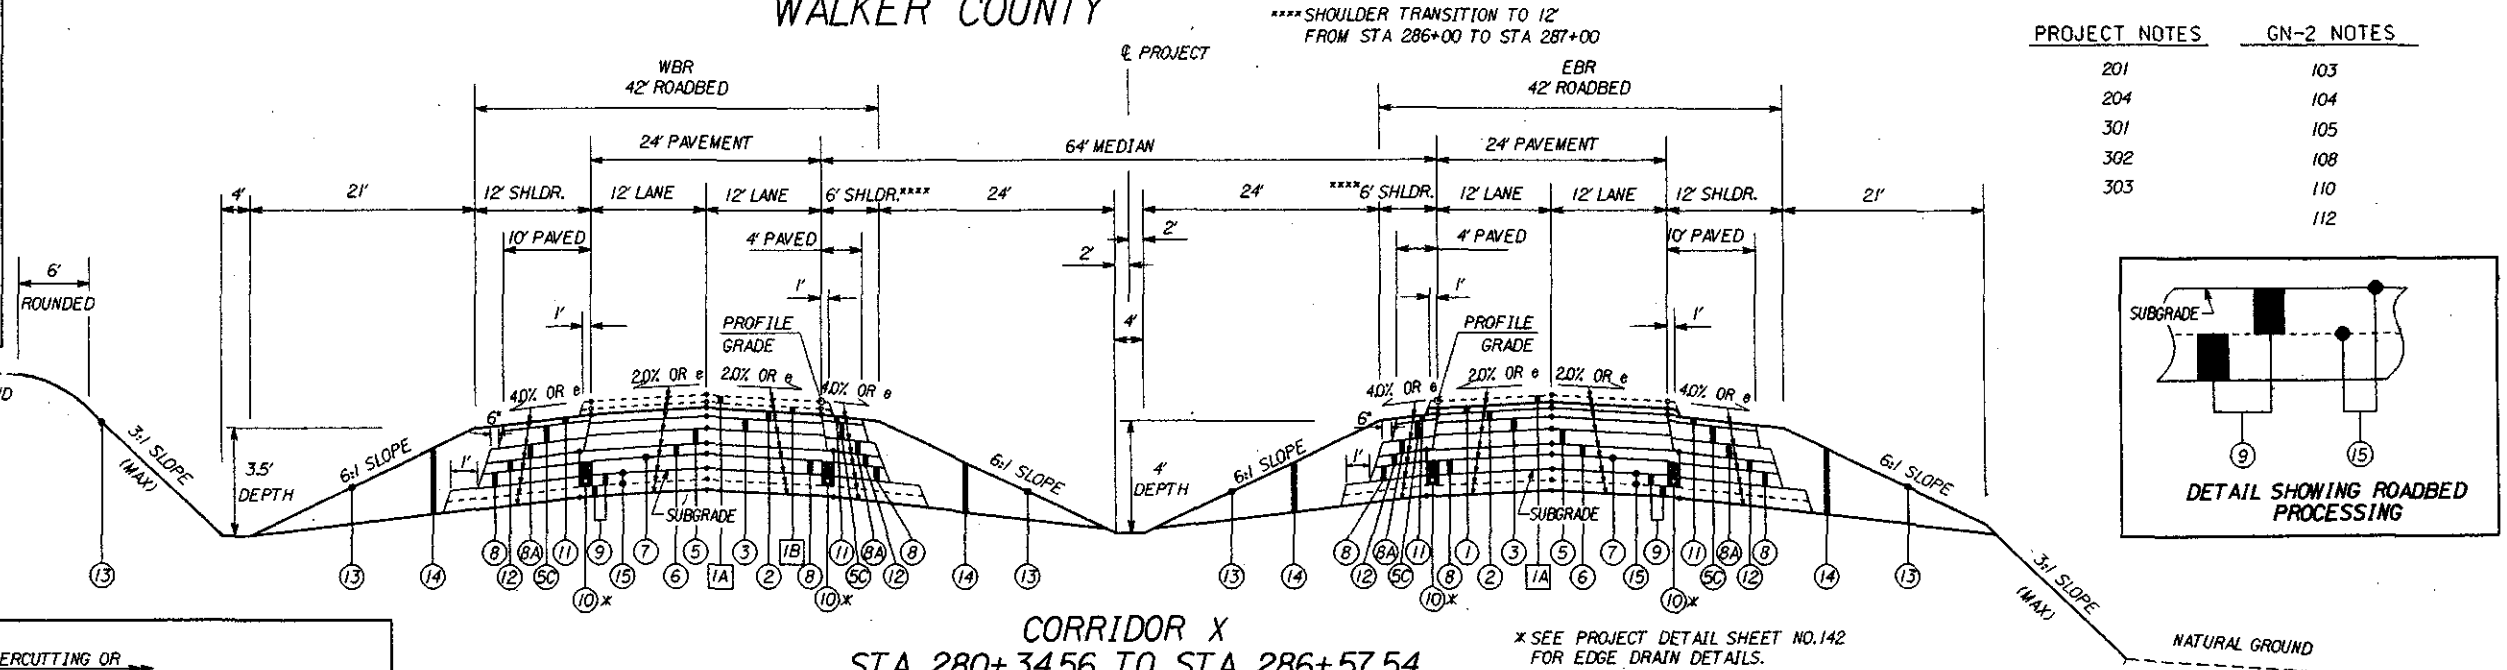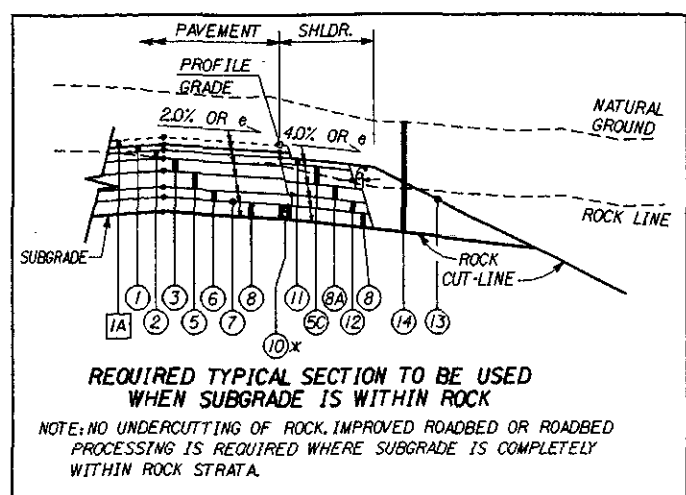

REQUIRED LEGEND

- [1A] REQ'D. SECOND STAGE PAVING (3.0" THICK) (NOT IN THIS CONTRACT)
- [1B] 420A-011 REQ'D. POLYMER MODIFIED OPEN GRADED FRICTION COURSE - MIX 2 (APPROX. 70 %/SQ.YD.) (26.0' WIDE) (NOT IN THIS CONTRACT)
- [1] 420A-011 REQ'D. POLYMER MODIFIED OPEN GRADED FRICTION COURSE - MIX 2 (APPROX. 70 %/SQ.YD.) (26.0' WIDE)
- [2] 424A-280 REQ'D. SUPERPAVE BITUMINOUS CONCRETE WEARING SURFACE LAYER, 1/2" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE E (APPROX. 110 %/SY) (24.0' WIDE)
- [3] 424B-281 REQ'D. SUPERPAVE BITUMINOUS CONCRETE UPPER BINDER LAYER, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE E (APPROX. 300 %/SY) (24.17' WIDE)
- [5] 424C-280 REQ'D. SUPERPAVE BITUMINOUS CONCRETE BASE LAYER, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE E (APPROX. 862 %/SY) (24.62' WIDE)
- [5A] 424C-280 REQ'D. SUPERPAVE BITUMINOUS CONCRETE BASE LAYER, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE E (APPROX. 640 %/SY) (25.0' WIDE)
- [5C] 424C-240 REQ'D. SUPERPAVE BITUMINOUS CONCRETE BASE LAYER, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE C (APPROX. 560 %/SY) (WIDTHS 4.0' INSIDE & 10.0' OUTSIDE)
- [5E] 424C-240 REQ'D. SUPERPAVE BITUMINOUS CONCRETE BASE LAYER, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE C (APPROX. 895 %/SY) (WIDTHS 4.0' INSIDE & 10.0' OUTSIDE)
- [6] 327E-000 REQ'D. 4" THICK PERMEABLE ASPHALT TREATED BASE (APPROX. 420 %/SY) (26.0' WIDE) (POUNDAGE SHALL BE ADJUSTED TO ACHIEVE THE REQ'D. 4" THICKNESS)
- [7] 604A-000 REQ'D. SEPARATIVE GEOTEXTILE
- [8] 301A-012 REQ'D. CRUSHED AGGREGATE BASE COURSE, TYPE B, PLANT MIXED, 6" COMPACTED THICKNESS (41.0' WIDE)
- [8A] 301A-012 REQ'D. CRUSHED AGGREGATE BASE COURSE, TYPE B, PLANT MIXED, 6" COMPACTED THICKNESS (WIDTHS 4.50' INSIDE & 10.50' OUTSIDE)
- [9] 210A-000 REQ'D. UNCLASSIFIED EXCAVATION (IMPROVED ROADBED 2 - 6" THICK LAYERS) (FULL ROADWAY WIDTH)
- [10] 605A-002 REQ'D. PAVEMENT EDGE DRAIN, (AGGREGATE FILLED UNDERDRAIN)
- [11] 401B-108 REQ'D. BITUMINOUS TREATMENT "G" (WITH POLYMER ADDITIVE) (WIDTHS 4.0' INSIDE & 10.0' OUTSIDE)
- [12] 301A-004 REQ'D. CRUSHED AGGREGATE BASE COURSE, TYPE B, PLANT MIXED, 4" COMPACTED THICKNESS (WIDTHS 5.0' INSIDE & 11.0' OUTSIDE)
- [13] 650B-000 REQ'D. TOPSOIL FROM STOCKPILES (APPROX. 4" THICK)
- [14] 210A-000 REQ'D. UNCLASSIFIED EXCAVATION
- [15] 230A-000 REQ'D. ROADBED PROCESSING
- [17] 450B-000 REQ'D. CEMENT CONCRETE BRIDGE END SLAB, 9" THICK (24.0' WIDE)
- [18] 424B-589 REQ'D. SUPERPAVE BITUMINOUS CONCRETE LOWER BINDER LAYER, LEVELING, 1" MAXIMUM AGGREGATE SIZE MIX, ESAL RANGE E (APPROX. 0 - 333 %/SY) (24.62' WIDE)

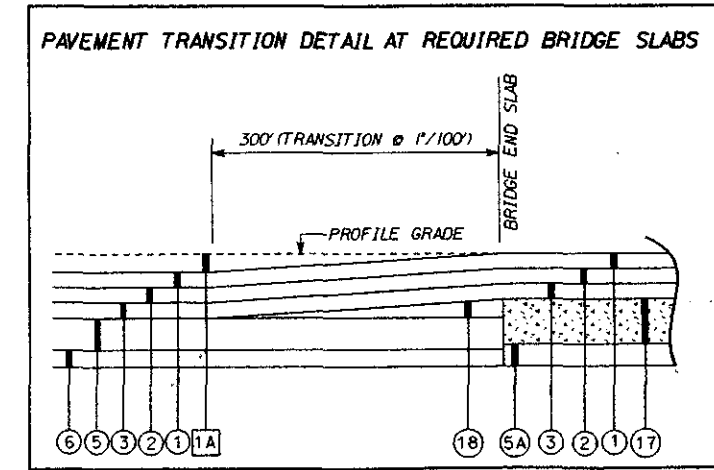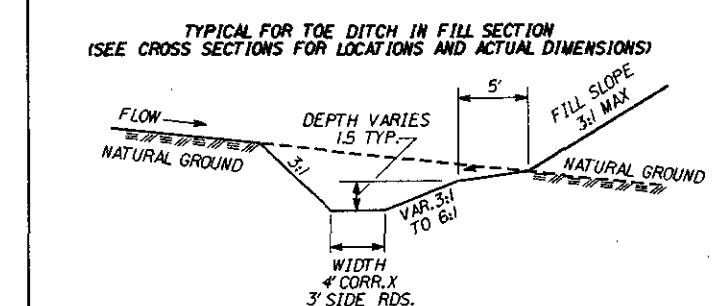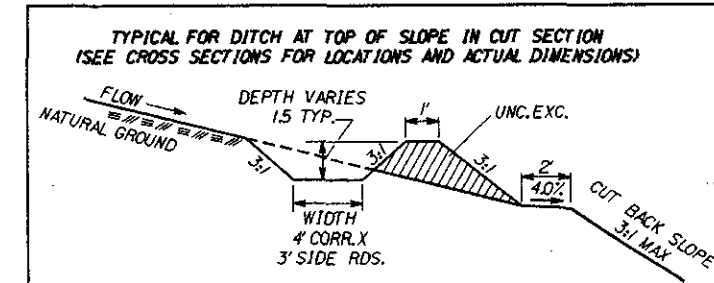

NOT TO SCALE

226A-TYP.DWG 07-09-99